


BRASS COUNTERSUNK SLOTTED

WOODSCREW BS1210

Countersunk slotted twin-thread woodscrews to BS1210. Available in hardened steel zinc plated and Brass

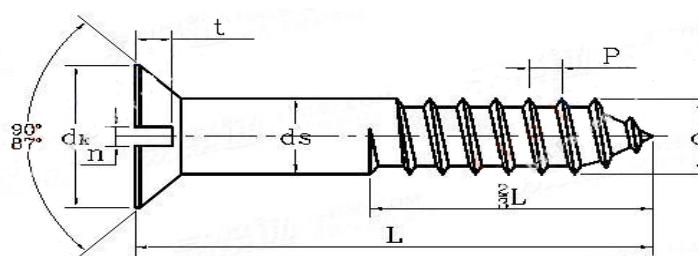

d s.w.g.	ds		n		t	dk	
	Max.	Min.	Max.	Min.		Max.	Min.
No.2*	0.085	0.078	0.033	0.026	0.021	0.164	0.156
No.3*	0.097	0.090	0.038	0.030	0.024	0.188	0.179
No.4	0.113	0.104	0.040	0.032	0.026	0.216	0.205
No.5*	0.127	0.117	0.045	0.035	0.032	0.244	0.232
No.6	0.141	0.131	0.050	0.040	0.036	0.272	0.258
No.7*	0.155	0.145	0.050	0.040	0.039	0.300	0.285
No.8	0.169	0.159	0.055	0.045	0.042	0.328	0.312
No.10	0.197	0.186	0.060	0.050	0.047	0.384	0.365
No.12	0.225	0.212	0.065	0.055	0.053	0.440	0.418
No.14	0.253	0.238	0.075	0.065	0.058	0.496	0.472
No.16*	0.281	0.266	0.075	0.065	0.069	0.552	0.524
No.18*	0.309	0.294	0.085	0.075	0.074	0.608	0.578
No.20*	0.337	0.322	0.085	0.075	0.079	0.664	0.631

*Denotes non-preferred diameter

All dimensions in inches.