



BS 5315  
KM06246



ISO 9001  
FM00547



ISO 14001  
EMS573195





# Hose Clips

Jubilee® is the original worm drive hose clip and for more than ninety years the company has supplied both original equipment and resale customers worldwide.

From the original patents to the current BS requirements, the company has led the world with consistent high quality product; combined with this is the eye catching point of sale material and practical packaging.

The comprehensive range of products enables users everywhere to be confident that Jubilee® has a clip to suit their application.

## Jubilee® the original – beware of imitations!

Jubilee clips are Kitemarked to BS 5315:1991 and the company is registered to BS EN ISO 9001:2008 Quality Management System and ISO 14001 Environmental Management System.



Jubilee® was instrumental in the formulation of the original British Standard in 1963 and, as users all over the world will testify, the consistent reliability of our product has set Jubilee® clips apart from its' competitors.

BS 5315  
KM06246

With over 90 years experience, we know exactly how to manufacture our clips to deliver the results our customers demand. We have a stringent quality control process - from raw material to finished product - and all product ranges are systematically checked to their various Standards during manufacture and packing.





All Jubilee® products conform to the latest EU Directives; furthermore we aim to work in a socially, ethically and environmentally responsible way ensuring that our manufacturing processes conform to environmental legislations. We continue to decrease the effect that our manufacturing output has on the environment and improve our packaging waste year on year, recycling as much as is possible.




## Test Performance

### Ultimate Breaking Torque Graph

### Maximum Pressure Graph

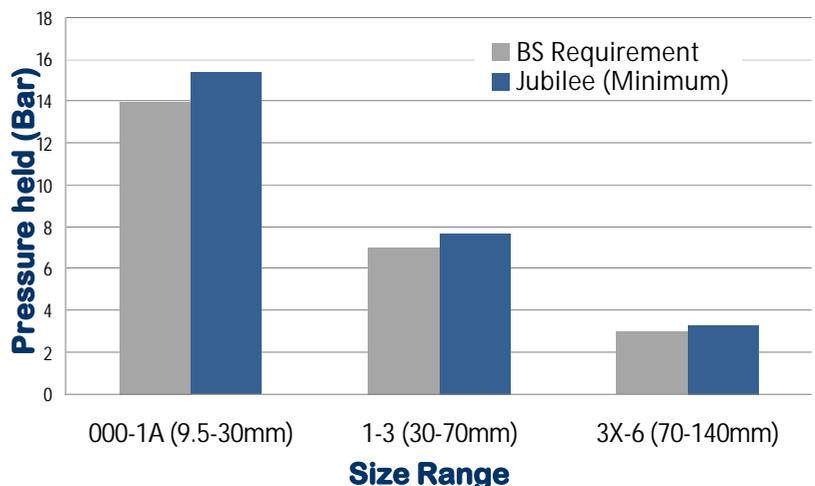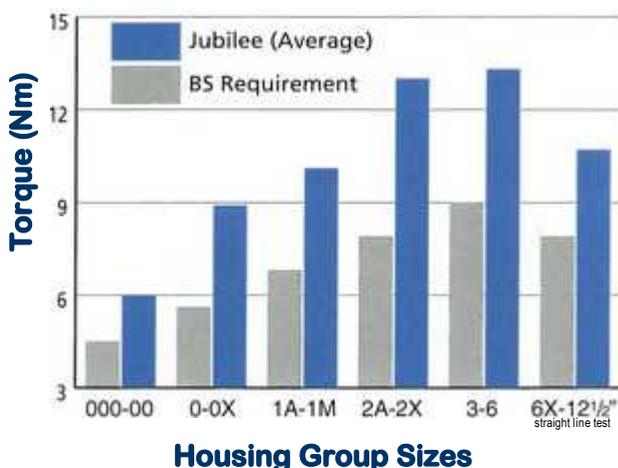

The performance of hose clips is determined by the hose type, spigot, tightening torque and hose working pressures – phone for technical advice.

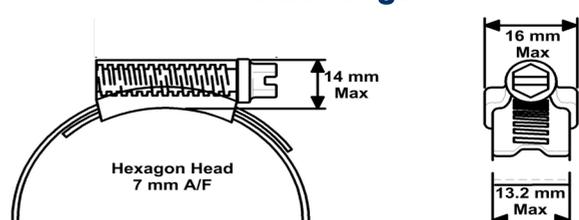



## Mild Steel Zinc Protected & Stainless Steel Clips



### JUBILEE® RANGE

| Size Ref. | BS No. | Adjustment |               | Band Width (mm) | Band Thickness (mm) | Carton Qty. | Pack Qty. | Weights Per 100 (kgs) | Size Ref. |
|-----------|--------|------------|---------------|-----------------|---------------------|-------------|-----------|-----------------------|-----------|
|           |        | mm         | Inches        |                 |                     |             |           |                       |           |
| 000       | 12     | 9.5- 12    | 3/8- 1/2      | 9.9             | 0.762               | 10          | 100       | 1.2                   | 000       |
| M00       | 16     | 11- 16     | 1/2-5/8       | 9.9             | 0.762               | 10          | 100       | 1.3                   | M00       |
| 00        | 20     | 13- 20     | 1/2-3/4       | 9.9             | 0.762               | 10          | 100       | 1.3                   | 00        |
| 0         | 22     | 16- 22     | 5/8- 7/8      | 13              | 0.914               | 10          | 100       | 2.2                   | 0         |
| 0X        | 25     | 18- 25     | 3/4-1         | 13              | 0.914               | 10          | 100       | 2.3                   | 0X        |
| 1A        | 30     | 22- 30     | 7/8-1 1/8     | 13              | 0.914               | 10          | 100       | 2.8                   | 1A        |
| 1         | 35     | 25- 35     | 1-1 3/8       | 13              | 0.914               | 10          | 100       | 3.0                   | 1         |
| 1X        | 40     | 30- 40     | 1 1/8-1 5/8   | 13              | 0.914               | 10          | 100       | 3.1                   | 1X        |
| 1M        | 45     | 32- 45     | 1 1/4-1 3/4   | 13              | 0.914               | 10          | 100       | 3.2                   | 1M        |
| 2A        | 50     | 35- 50     | 1 3/8-2       | 13              | 0.914               | 10          | 100       | 3.9                   | 2A        |
| 2         | 55     | 40- 55     | 1 5/8-2 1/8   | 13              | 0.914               | 10          | 100       | 4.0                   | 2         |
| 2X        | 60     | 45- 60     | 1 3/4 -2 3/8  | 13              | 0.914               | 10          | 100       | 4.2                   | 2X        |
| 3         | 70     | 55- 70     | 2 1/8-2 3/4   | 13              | 0.914               | 10          | 50        | 4.5                   | 3         |
| 3X        | 80     | 60- 80     | 2 3/8-3 1/8   | 13              | 0.914               |             | 150       | 4.8                   | 3X        |
| 4         | 90     | 70- 90     | 2 3/4-3 1/2   | 13              | 0.914               |             | 125       | 5.1                   | 4         |
| 4X        | 100    | 85-100     | 3 1/4-4       | 13              | 0.914               |             | 100       | 5.4                   | 4X        |
| 5         | 120    | 90-120     | 3 1/2-4 3/4   | 13              | 0.914               |             | 100       | 6.0                   | 5         |
| 6         | 140    | 110-140    | 4 3/8-5 1/2   | 13              | 0.914               |             | 75        | 6.9                   | 6         |
| 6X        | 150    | 120-150    | 4 3/4-5 7/8   | 13              | 0.914               |             | 50        | 7.1                   | 6X        |
| 7         | 165    | 135-165    | 5 1/4-6 1/2   | 13              | 0.914               |             | 50        | 7.6                   | 7         |
| 7 1/2     | 190    | 158-190    | 6 1/4-7 1/2   | 13              | 0.914               |             | 50        | 8.5                   | 7 1/2     |
| 8 1/2     | 216    | 184-216    | 7 1/4-8 1/2   | 13              | 0.914               |             | 50        | 9.1                   | 8 1/2     |
| 9 1/2     | 242    | 210-242    | 8 1/4-9 1/2   | 13              | 0.914               |             | 50        | 9.9                   | 9 1/2     |
| 10 1/2    | 267    | 235-267    | 9 1/4-10 1/2  | 13              | 0.914               |             | 50        | 10.5                  | 10 1/2    |
| 11 1/2    | 292    | 260-292    | 10 1/4-11 1/2 | 13              | 0.914               |             | 50        | 11.3                  | 11 1/2    |
| 12 1/2    | 318    | 286-318    | 11 1/4-12 1/2 | 13              | 0.914               |             | 50        | 12.2                  | 12 1/2    |

### MATERIAL SPECIFICATION

| Material     | Mild Steel               | 304 Stainless Steel | 316 Stainless Steel |
|--------------|--------------------------|---------------------|---------------------|
| Band:        | BS 1449 Pt. 1            | All components      | All components      |
| Housing:     | BS 1449 Pt. 1            | Type 304 (A2)       | Type 316 (A4)       |
| Screw:       | BS 3111                  | BS 1449 Pt. 2       | BS 1449 Pt. 2       |
| Zinc Finish: | Meets BS 7479 48 hrs NSS | DIN 1.4301          | DIN 1.4401          |

For larger sizes please contact us.





# Driver Selection

[Top: Jubilee Flexidriver® Middle: 160mm Jubilee Clipdriver® Bottom: 95mm Jubilee Clipdriver®]




Jubilee Flexidriver® - flexible shaft tool for efficient and rapid adjustment of Jubilee clips



Jubilee Clipdriver® - rigid shaft tool for easy adjustment of Jubilee clips.



Available in 95mm & 160mm lengths.

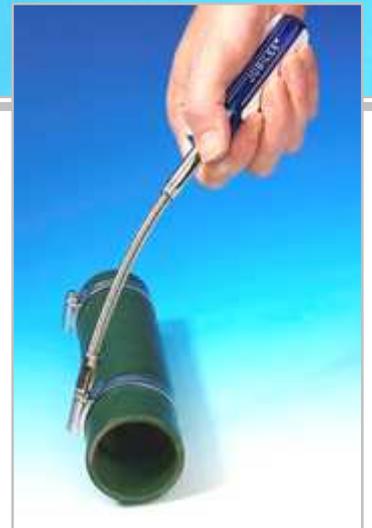

High precision tools specifically designed for efficient, rapid and easy adjustment of Jubilee clips to their optimum torque. The invaluable Flexidriver with flexible shaft has been designed to reach all those awkward places while the Clipdriver has a rigid shaft and is available in two lengths (95mm & 160mm).

The 'drivers are high quality precision tools incorporating a 7mm A/F socket head specially designed for Jubilee® hose clips.

Suitable for most workshops, maintenance and DIY applications.





# Superclamps

## Heavy Duty Bolt Clamps for use on heavy duty hoses



Used for demanding applications, the Jubilee Superclamp is easily adjusted by a single nut and bolt.


Available in:-

- Mild steel zinc plated
- 304 (A2) (W4) stainless steel
- 316 (A4) (W5) stainless steel



Mild steel zinc plated product specification:-

| Part No. | Min-Max Dia. mm | Screw DIN 933 [A] | Band Width mm [B] | Band Thickness mm [C] | Tightening Torque Nm | Screw Head A/F mm [D] | Qty. Per Box | Weight Per Box Kgs |
|----------|-----------------|-------------------|-------------------|-----------------------|----------------------|-----------------------|--------------|--------------------|
| JSC019   | 17-19           |                   |                   |                       |                      |                       | 100          | 2.8                |
| JSC022   | 20-22           |                   |                   |                       |                      |                       | 100          | 2.9                |
| JSC025   | 23-25           | M5                | 18                | 0.6                   | 6                    | 8                     | 100          | 3.1                |
| JSC028   | 26-28           |                   |                   |                       |                      |                       | 100          | 3.2                |
| JSC031   | 29-31           |                   |                   |                       |                      |                       | 100          | 3.3                |
| JSC035   | 32-35           |                   |                   |                       |                      |                       | 100          | 7.3                |
| JSC039   | 36-39           |                   |                   |                       |                      |                       | 90           | 6.7                |
| JSC043   | 40-43           |                   |                   |                       |                      |                       | 75           | 5.7                |
| JSC047   | 44-47           | M6                | 20                | 1                     | 8                    | 10                    | 75           | 5.8                |
| JSC051   | 48-51           |                   |                   |                       |                      |                       | 70           | 6.0                |
| JSC055   | 52-55           |                   |                   |                       |                      |                       | 60           | 5.0                |
| JSC059   | 56-59           |                   |                   |                       |                      |                       | 50           | 4.4                |
| JSC063   | 60-63           |                   |                   |                       |                      |                       | 40           | 3.6                |
| JSC067   | 64-67           |                   |                   |                       |                      |                       | 60           | 11.8               |
| JSC073   | 68-73           |                   |                   |                       |                      |                       | 52           | 10.9               |
| JSC079   | 74-79           |                   |                   |                       |                      |                       | 48           | 10.7               |
| JSC085   | 80-85           |                   |                   |                       |                      |                       | 44           | 9.1                |
| JSC091   | 86-91           |                   |                   |                       |                      |                       | 36           | 7.2                |
| JSC097   | 92-97           | M8                | 25                | 1.5                   | 25                   | 13                    | 32           | 7.3                |
| JSC103   | 98-103          |                   |                   |                       |                      |                       | 24           | 5.6                |
| JSC112   | 104-112         |                   |                   |                       |                      |                       | 24           | 5.9                |
| JSC121   | 113-121         |                   |                   |                       |                      |                       | 20           | 5.0                |
| JSC130   | 122-130         |                   |                   |                       |                      |                       | 16           | 4.3                |
| JSC139   | 131-139         |                   |                   |                       |                      |                       | 16           | 4.4                |
| JSC148   | 140-148         |                   |                   |                       |                      |                       | 12           | 3.8                |
| JSC161   | 149-161         |                   |                   |                       |                      |                       | 8            | 2.5                |
| JSC174   | 162-174         |                   |                   |                       |                      |                       | 42           | 14.2               |
| JSC187   | 175-187         |                   |                   |                       |                      |                       | 28           | 10.2               |
| JSC200   | 188-200         | M8                | 25                | 1.8                   | 25                   | 13                    | 28           | 10.2               |
| JSC213   | 201-213         |                   |                   |                       |                      |                       | 28           | 10.5               |
| JSC226   | 214-226         |                   |                   |                       |                      |                       | 14           | 6.0                |
| JSC239   | 227-239         |                   |                   |                       |                      |                       | 14           | 6.0                |
| JSC252   | 240-252         |                   |                   |                       |                      |                       | 14           | 6.3                |
| JSC265   | 253-265         |                   |                   |                       |                      |                       | 14           | 6.3                |

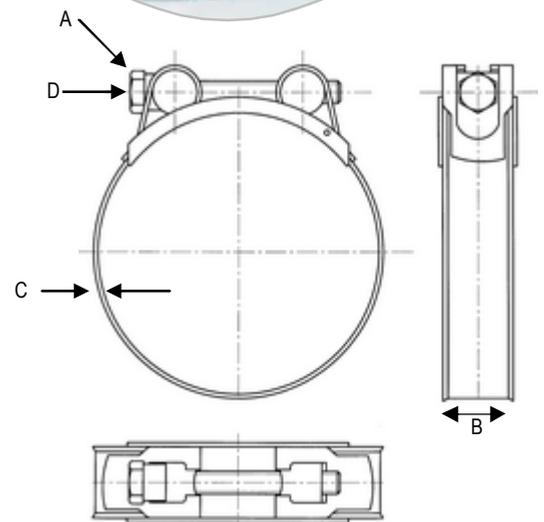

Jubilee® is a registered trade mark of L Robinson & Co (Gillingham) Limited.


304 & 316 S/S Clamps – Please contact us for the full product specification






# High Torque

For applications requiring extra high levels of tightening torque

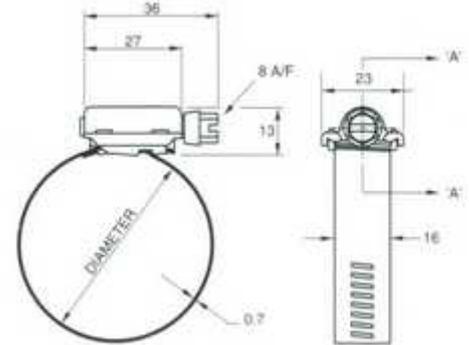

All dimensions in mm

SECTION 'A-A'

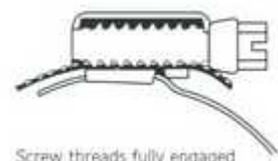

- Twice the tightening torque of standard worm drive hose clips which creates more than twice the band tension for those stubborn leakage and high vibration applications.
- All stainless steel construction.
- Breaking torque of Jubilee high torque is 17 Nm comparable to conventional 'T' bolt clamp of equal size.
- Recommended tightening torque 11.9 Nm (106 lb in).
- Jubilee High Torque clips for applications that require extra high levels of tightening torque.
- They can be used on hose applications such as spiral wound wire reinforced suction hose.
- High Torque clips are appropriate in those heavy duty situations where the general British Standard product is not suitable.

Ask our Sales Department for further information.

| MATERIAL SPECIFICATION |                |
|------------------------|----------------|
| Stainless Steel        |                |
| Band:                  | BS/AISI 304 A2 |
| Housing:               | BS/AISI 304 A2 |
| Screw:                 | BS/AISI 410    |

| Size No. | Working Diameter |                 | Box Quantities |
|----------|------------------|-----------------|----------------|
|          | mm               | Inches          |                |
| HT035    | 20- 35           | 3/4 - 1 3/8     | 50             |
| HT040    | 25- 40           | 1 - 1 5/8       | 50             |
| HT045    | 25- 45           | 1 - 1 3/4       | 50             |
| HT050    | 30- 50           | 1 1/4 - 2       | 50             |
| HT070    | 40- 70           | 1 5/8 - 2 3/4   | 50             |
| HT080    | 60- 80           | 2 3/8 - 3 1/8   | 50             |
| HT095    | 70- 95           | 2 3/4 - 3 3/4   | 50             |
| HT100    | 80-100           | 3 1/8 - 4       | 50             |
| HT120    | 90-120           | 3 1/2 - 4 3/4   | 50             |
| HT140    | 110-140          | 4 3/8 - 5 1/2   | 50             |
| HT160    | 130-160          | 5 1/8 - 6 1/4   | 50             |
| HT180    | 150-180          | 5 7/8 - 7       | 50             |
| HT200    | 170-200          | 6 3/4 - 7 7/8   | 25             |
| HT220    | 190-220          | 7 1/2 - 8 5/8   | 25             |
| HT240    | 210-240          | 8 1/4 - 9 1/2   | 25             |
| HT260    | 230-260          | 9 - 10 1/4      | 25             |
| HT280    | 250-280          | 9 7/8 - 11      | 25             |
| HT300    | 270-300          | 10 5/8 - 11 3/4 | 25             |
| HT320    | 290-320          | 11 3/8 - 12 1/2 | 25             |
| HT340    | 310-340          | 12 1/4 - 13 3/8 | 25             |
| HT360    | 330-360          | 13 - 14 1/8     | 25             |
| HT380    | 350-380          | 13 3/4 - 15     | 25             |
| HT400    | 370-400          | 14 1/2 - 15 3/4 | 25             |
| HT420    | 390-420          | 15 3/8 - 16 1/2 | 25             |
| HT440    | 410-440          | 16 1/8 - 17 1/4 | 25             |
| HT460    | 430-460          | 17 - 18 1/8     | 25             |
| HT480    | 450-480          | 17 3/4 - 18 7/8 | 25             |
| HT500    | 470-500          | 18 1/2 - 19 5/8 | 25             |






# Multiband

“SNIP THE CLIP”

**Don't get caught out in an emergency.....**


- Choose Jubilee® Multiband to make a clip to any size
- Quick, versatile and handy
- Simply cut to length, add a housing, insert a screw and tighten to size

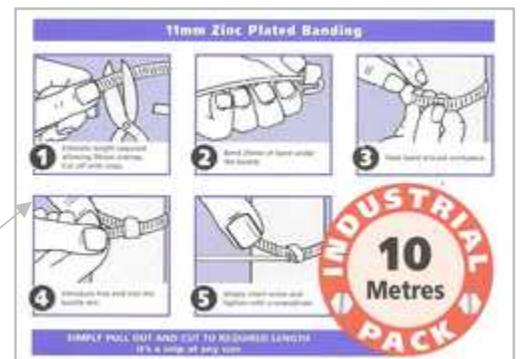


**Did you know?..... The Jubilee® Multiband range is available in:-**

### 11MM ZINC PLATED MILD STEEL:-


- MB1701 Banding in dispensers containing 10 metres
- MB1702 Banding in dispensers containing 30 metres
- MB1703 Housings/screws in boxes containing 100 sets
- MB1704 Housings/screws in boxes containing 25 sets
- MB1705 Housings/Allen socket screws in boxes containing 100 sets
- MB1706 Captive screws in boxes containing 100
- MB1708 Handy Pack (10 metres of band with 25 housings/screws)



Slotted Screw  
11mm zinc plated  
mild steel or  
stainless steel.



Captive Screw  
11mm zinc plated  
mild steel or  
stainless steel.



Allen Screw  
11mm zinc plated  
mild steel or  
stainless steel.  
(3/16")



Flip/Lock Screw  
7mm all stainless  
steel.

### 11MM STAINLESS STEEL (304):-

- MB1802 Banding in dispensers containing 30 metres
- MB1803 Housings/screws in boxes containing 100 sets
- MB1804 Housings/Allen socket screws in boxes containing 100 sets
- MB1805 Captive screws in boxes containing 100
- MB1806 Handy Pack (10 metres of band with 25 housings/screws)

### 7MM SLIMLINE STAINLESS STEEL (304):-

- MB1601 Banding in dispensers containing 25 metres
- MB1602 Banding in dispensers containing 50 metres
- MB1603 Flip/Lock housings/screws in boxes containing 25 sets
- MB1604 Flip/Lock housings/screws in boxes containing 100 sets

Every toolbox should have a versatile Multiband handy pack containing all you need to make your own fastener





# 'O' Clips

## 2-Ear Clamps from Tube



2-Ear clamp widely used for maintenance and OEM applications. Mainly used on air, fluid, gas and steam lines, also suitable for low pressure hydraulic applications.

Ideal for where the requirement is for a neat finish with no bulky housing to catch on obstructions.

Pincers are used to crimp the ears of the clamps and affect a proper seal.



### Available in:

- Mild steel zinc plated, clear passivated
- Stainless steel 304 (special order)

### Pincers:



**Normal Closing** (Part No. 1098)  
**Side Closing\*** (Part No. 1099)


\*For use when access to ear is difficult

| Part No. | Theoretical Clamping Range mm | Width mm | Thickness mm | Inner Width of Ear mm | Polybag Pack Qty. |
|----------|-------------------------------|----------|--------------|-----------------------|-------------------|
| OC0041   | 3.1-4.1                       | 3.5      | 0.5          | 1.5                   | 50                |
| OC0045   | 3.5-4.5                       | 3.5      | 0.6          | 1.5                   | 50                |
| OC0305   | 3.0-5.0                       | 5.0      | 0.7          | 2.5                   | 50                |
| OC0507   | 5.0-7.0                       | 6.0      | 0.7          | 3.0                   | 50                |
| OC0709   | 7.0-9.0                       | 7.0      | 1.0          | 3.2                   | 50                |
| OC0811   | 8.0-11.0                      | 7.0      | 1.0          | 4.5                   | 50                |
| OC0911   | 9.0-11.0                      | 7.0      | 1.0          | 3.5                   | 50                |
| OC1113   | 11.0-13.0                     | 7.0      | 1.0          | 3.5                   | 50                |
| OC1315   | 13.0-15.0                     | 7.5      | 1.0          | 4.0                   | 50                |
| OC1517   | 15.0-17.0                     | 8.0      | 1.2          | 5.0                   | 50                |
| OC1518   | 15.0-18.0                     | 8.0      | 1.2          | 5.0                   | 50                |
| OC1619   | 16.0-19.0                     | 8.0      | 1.2          | 5.0                   | 50                |
| OC1720   | 17.0-20.0                     | 8.5      | 1.2          | 6.0                   | 50                |
| OC1922   | 19.0-22.0                     | 9.0      | 1.5          | 6.5                   | 50                |
| OC2023   | 20.0-23.0                     | 9.0      | 1.5          | 6.5                   | 50                |
| OC2225   | 22.0-25.0                     | 10.0     | 1.5          | 6.5                   | 25                |
| OC2327   | 23.0-27.0                     | 10.0     | 1.5          | 7.0                   | 25                |
| OC2528   | 25.0-28.0                     | 10.0     | 1.5          | 6.5                   | 25                |
| OC2731   | 27.0-31.0                     | 10.0     | 1.5          | 7.5                   | 25                |
| OC2831   | 28.0-31.0                     | 10.0     | 1.5          | 6.5                   | 25                |
| OC3134   | 31.0-34.0                     | 10.0     | 1.5          | 7.5                   | 25                |
| OC3437   | 34.0-37.0                     | 10.0     | 1.5          | 8.0                   | 25                |
| OC3740   | 37.0-40.0                     | 10.0     | 1.5          | 8.0                   | 25                |
| OC4043   | 40.0-43.0                     | 10.0     | 1.5          | 8.5                   | 25                |
| OC4346   | 43.0-46.0                     | 10.0     | 1.5          | 8.5                   | 25                |






**INSTALLATION**

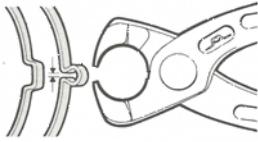

When installing 'O' clips, please note that each ear must be crimped as recommended to obtain a proper seal.




An incorrectly made installation may impair the best connection. If a clamp ear can be closed all the way, the clip size selected is probably too big and the next smaller size should be ordered.


**HOW TO APPLY:**



Position clip on hose as illustrated.

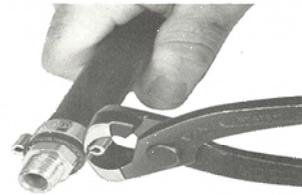

Give each ear a firm squeeze with your pincers.



Where access to ear is difficult, use side closing pincers

**HOW TO REMOVE:**



Grip the outer edge of ear firmly and cut through it with either pincers.



Cut the ear by taking several small bites at its base with either pincers.



Then grip ear firmly and twist it off.

While both ears must be closed all the way to effect a proper seal, 2-ear clamps are best installed with one ear closed all the way first. The second ear is then closed so that the first ear opens slightly (gap to be approximately 1.5mm). This builds a resilient strength into the clamp in a spring-like action to hold against pressure, vibration and hose shrinkage due to temperature changes or ageing.

Rubber hose, plastic tubing, coaxial, rope and electrical cable are all easily clamped with this product.

The one piece design offers a positive, tamper-proof seal without damage to the hose.

Jubilee 'O' clips assure adequate closure and will compensate for tolerance variations in hose sizes.

## 'O' Clips Kit from Jubilee

The 'O' clip kit is a versatile and convenient dispenser for the most popular sizes of double ear clips.

The kit comes complete with/without normal closing pincer and is ideal for the user who needs to have a selection of different size clips available when on the move.

Total contents: 175 'O' clips +/- normal closing pincer

| CONTENTS |          |                |              |
|----------|----------|----------------|--------------|
| Quantity | Part No. | Clamping Range | Nominal Size |
| 20       | OC0507   | 5- 7mm         | 1/4"         |
| 20       | OC0709   | 7- 9mm         | 5/16"        |
| 20       | OC0811   | 8-11mm         | 3/8"         |
| 20       | OC0911   | 9-11mm         | 7/16"        |
| 20       | OC1113   | 11-13mm        | 1/2"         |
| 15       | OC1315   | 13-15mm        | 9/16"        |
| 20       | OC1517   | 15-17mm        | 19/32"       |
| 20       | OC1518   | 15-18mm        | 5/8"         |
| 20       | OC1720   | 17-20mm        | 3/4"         |


Material: Mild steel zinc plated and clear passivated  
 Available: With pincer (OKP175MS) / without normal closing pincer (OK175MS)  
 Dimensions mm: 40 [H] x 270 [W] x 175 [D]





# Juniors

(Nut & Bolt Clips)

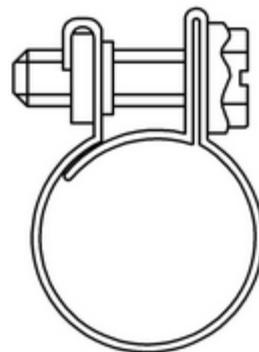

## SPECIFICATION

| Part No. | Adjustment |  |
|----------|------------|--|
| NB0709   | 07-09mm    | Tightening Torque:<br>Maximum 1.2 Nm     |
| NB0810   | 08-10mm    |  |
| NB0911   | 09-11mm    | Screw: 7mm A/F                           |
| NB1012   | 10-12mm    |  |
| NB1113   | 11-13mm    | Material:<br>Zinc finished mild<br>steel |
| NB1214   | 12-14mm    |  |
| NB1315   | 13-15mm    | 304 Stainless steel*                     |
| NB1416   | 14-16mm    |  |
| NB1517   | 15-17mm    |  |
| NB1618   | 16-18mm    |  |
| NB1820   | 18-20mm    |  |

Jubilee Juniors are ideal for use on petrol pipes and small bore hoses.

Small nut and bolt clips used mainly in the motor trade for securing petrol pipes, heater hoses and small bore applications etc. Manufactured in both zinc plated mild steel and 304 stainless steel with a standard 7mm hexagon headed screw.

Available in:-

- Zinc Finished Mild Steel
- 304 Stainless Steel

\* Stainless steel available in sizes 0709 to 1416 only.






# CV Clip Kit

## Constant Velocity Boot Clip

Part No. CVK015SS

The new CV boot kit from Jubilee contains two sizes of clip which secure the rubber bellows to the CV joint and protect it from dirt and water as well as preventing lubricants from leaking.

Easy installation by interlocking the clip hooks on the outside of the band and crimping the ear to secure. The clip must be shaped prior to assembly.

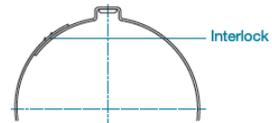


Both clip sizes have a choice of engagement positions to easily adjust to different diameters.

Essential for MOT legislation.




### Assembly Instructions:-

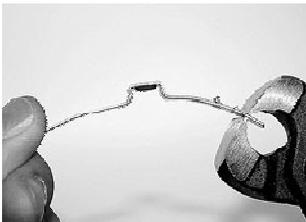

Pre-shape clip.



Determine the required clamp length.

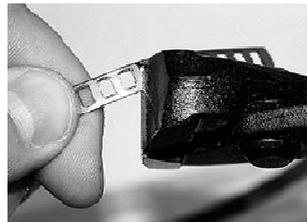

Cut to size and remove excess material. To avoid cuts smooth rough edges.



Fit clip over application. Engage interlocking hooks in tightest available position. Firmly crimp the ear with pincers.

### CLIP / PACK GUIDE

| Size Range (mm) | Width x Thickness (mm) | Quantity in Pack |
|-----------------|------------------------|------------------|
| 25- 50          | 7 x 0.8                | 5                |
| 40-110          | 7 x 0.8                | 10               |

Manufactured in 304 (A2) (W4) grade stainless steel





# Wingspade®



This product range is manufactured to DIN Standard and has a plastic spade for ease of use.

Wingspades are typically used on garden hoses and domestic applications where there is a requirement for frequent tightening/loosening on low torque applications; mainly for the hardware market.

The range starts from 9.5mm and extends through to 70mm. Mild steel zinc protected clips only.

## SIZE / PACK GUIDE

| Size No. | Working Diameter (mm) | Polybag Qty. |
|----------|-----------------------|--------------|
| WS012    | 9.5-12                | 20           |
| WS016    | 11-16                 | 20           |
| WS020    | 13-20                 | 20           |
| WS025    | 16-25                 | 20           |
| WS032    | 20-32                 | 20           |
| WS040    | 25-40                 | 20           |
| WS050    | 32-50                 | 20           |
| WS060    | 40-60                 | 20           |
| WS070    | 50-70                 | 20           |

Mild steel clips with their own spade for easy hand tightening

## Material Specification

**Band/Screw/Housing:** Mild Steel Zinc Protected

**Wingspade:** Acetal Plastic

**Colour:** Blue (For colours other than blue, minimum order quantity 10000 per size)





# Clip Dispenser

Part No. CD100

## The Indispensable Dispenser



304 Stainless Steel (left) & Mild Steel Zinc Protected (right)



BS 5315  
KM06246

The essential Jubilee Clip Dispenser not only holds individual Jubilee clips, but also the superb Jubilee Flexidriver tool (for correct adjustment of Jubilee clips).

The strong wire frame is easily re-stockable and the unit can be wall mounted or left free standing.

Eye catching and functional, watch your stock turn significantly increase with the Jubilee CD100.

Gain the upper hand with the CD100 – easy to see, easy to sell.

Available in:-

- Mild Steel Zinc Protected (CD100MS)
- 304 Stainless Steel (CD100SS)

### DISPENSER CONTENTS

| Size                     | Adjustment |             | Quantity |
|--------------------------|------------|-------------|----------|
|                          | mm         | Inches      |          |
| 000                      | 9.5-12     | 3/8-1/2     | 10       |
| M00                      | 11-16      | 1/2-5/8     | 10       |
| 00                       | 13-20      | 1/2-3/4     | 10       |
| 0                        | 16-22      | 5/8-7/8     | 10       |
| 0X                       | 18-25      | 3/4-1       | 10       |
| 1A                       | 22-30      | 7/8-1 1/8   | 10       |
| 1                        | 25-35      | 1-1 3/8     | 10       |
| 1X                       | 30-40      | 1 1/8-1 5/8 | 10       |
| 1M                       | 32-45      | 1 1/4-1 3/4 | 10       |
| 2A                       | 35-50      | 1 3/8-2     | 10       |
| Jubilee Flexidriver tool |            |             | 1        |

100 Jubilee worm drive hose clips + 1 Jubilee Flexidriver  
 Dimensions (mm): 340 [H] x 330 [W] x 180 [D]  
 Total weight when full: 3.875 Kgs

90 years of engineering excellence in one clip





# Handy Pack

Part No. HP100

Buy the top ten – in one hit!



The most popular sizes of premium brand Jubilee® hose clips individually boxed and handily packed in their own outer display carton.

100 clips in the ultimate point of sale package.



BS 5315  
KM06246

Available in:

- Mild Steel Zinc Protected (HP100MS)
- 304 Stainless Steel (HP100SS)

| PACK CONTENTS |            |             |          |
|---------------|------------|-------------|----------|
| Size          | Adjustment |             | Quantity |
|               | mm         | Inches      |          |
| 000           | 9.5-12     | 3/8-1/2     | 10       |
| M00           | 11-16      | 1/2-5/8     | 10       |
| 00            | 13-20      | 1/2-3/4     | 10       |
| 0             | 16-22      | 5/8-7/8     | 10       |
| 0X            | 18-25      | 3/4-1       | 10       |
| 1A            | 22-30      | 7/8-1 1/8   | 10       |
| 1             | 25-35      | 1-1 3/8     | 10       |
| 1X            | 30-40      | 1 1/8-1 5/8 | 10       |
| 1M            | 32-45      | 1 1/4-1 3/4 | 10       |
| 2A            | 35-50      | 1 3/8-2     | 10       |

100 Jubilee worm drive hose clips  
 Dimensions mm: 270 [H] x 310 [W] x 262 [D] (85 [H] when closed)  
 Total weight when full: 2.75 Kgs



The Handy Pack has a multitude of uses and can be used as a point of sale dispenser, stores assortment pack or mobile stock pack.

Order now and receive your outer display carton free.

Hoses demand Jubilee!





# Workshop Pack

(Part no. HCP143)

## The Ultimate Container



Versatile, re-usable container with eight separate compartments holding 143 assorted Jubilee worm drive hose clips (size 9.5 to 40mm).



BS 5315  
KMO6246

Available in:-

- **Mild Steel Zinc Protected** (HCP143MS)
- **304 Stainless Steel** (HCP143SS)

Premium brand Jubilee® clips are made from the finest quality materials and are recognised for proven reliability and ultimate performance.

Hoses demand 

### PACK CONTENTS

| Size | Adjustment | Quantity |
|------|------------|----------|
| 000  | 9.5-12mm   | 24       |
| M00  | 11-16mm    | 32       |
| 00   | 13-20mm    | 28       |
| 0    | 16-22mm    | 13       |
| 0X   | 18-25mm    | 14       |
| 1A   | 22-30mm    | 12       |
| 1    | 25-35mm    | 13       |
| 1X   | 30-40mm    | 7        |

143 Jubilee worm drive hose clips  
Dimensions mm: 55 [H] x 330 [W] x 250 [D]  
Total weight when full: 3.6 Kgs





# Smart Dispenser

Part No. SD540

## The Intelligent Selection



304 Stainless Steel (left) & Mild Steel Zinc Protected (right)

This versatile and convenient dispenser from Jubilee is stylish and unique by design. It dispenses Jubilee clips in boxes of ten and singly and also carries the much prized Flexidriver tool for easy adjustment of Jubilee clips.

- Increase your sales of Jubilee clips with this smart visible display
- Continually working to sell more Jubilee clips
- Keeps your stock tidy and ready for sale.



BS 5315  
KM06246

Be sure to take advantage of every opportunity to make a sale - order a Smart Dispenser now for your trade counter or for use as a stock dispenser.

Available in:-

- Mild steel zinc protected (SD540MS)
- 304 Stainless steel (SD540SS)

### CONTENTS

| Quantity  | Size Ref.             | BS No. | Adjustment mm |
|---|-----------------------|--------|---------------|
| 60  | 000                   | 12     | 9.5-12        |
| 60  | M00                   | 16     | 11-16         |
| 60  | 00                    | 20     | 13-20         |
| 50  | 0                     | 22     | 16-22         |
| 50  | 0X                    | 25     | 18-25         |
| 40  | 1A                    | 30     | 22-30         |
| 50  | 1                     | 35     | 25-35         |
| 50  | 1X                    | 40     | 30-40         |
| 40  | 1M                    | 45     | 32-45         |
| 40  | 2A                    | 50     | 35-50         |
| 40  | 2                     | 55     | 40-55         |
| 2   | Jubilee Flexidriviers |        |               |
| 540 Jubilee worm drive hose clips + 2 Flexidriviers |                       |        |               |
| Total weight when full: 16.3 Kgs                    |                       |        |               |
| Dimensions (mm): 380 [H] x 580 [W] x 250 [D]        |                       |        |               |

Innovation in everyday use





# Junior Assortment

The Essential Fastener Pack  
for Small Bore Hoses

Part No. JA165



## BOX CONTENTS

| Part No. | Adjustment | Quantity |
|----------|------------|----------|
| 0709     | 07-09mm    | 25       |
| 0810     | 08-10mm    | 25       |
| 0911     | 09-11mm    | 25       |
| 1012     | 10-12mm    | 30       |
| 1113     | 11-13mm    | 30       |
| 1214     | 12-14mm    | 30       |

165 Assorted Jubilee Juniors (Nut & Bolt Clips)

Dimensions (mm): 40 [H] x 270 [W] x 175 [D]

Total weight when full: 1.35 Kgs

**165 assorted nut and bolt clips (size 07 to 14mm) in a multipurpose, re-usable box divided into 9 compartments.**

**For use on petrol pipes and small bore hoses.**

**Available in:-**

- **Zinc Finished Mild Steel** (JA165MS)
- **304 Stainless Steel** (JA165SS)





# Pocket Pack

## Small in Size, BIG in Value

(Part no. PPAUTO)

Never again be caught out without that essential Jubilee clip to complete the job. This brand new compact container holds a useful selection of Jubilee clips for all those necessary hose joining applications as well as holding nut and bolt clips for joining small bore hoses and petrol pipes.

This small, plastic reusable container has 6 separate compartments and holds a selection of 16 assorted Jubilee worm drive hose clips (size 13 to 40mm) and 8 nut and bolt clips (size 7 to 13mm).



Sold in packs of 10

| POCKET PACK CONTENTS                        |           |            |             |
|---|-----------|------------|-------------|
| Qty.  | Size Ref. | Adjustment |             |
|   |           | mm         | Inches      |
| Jubilee® Worm Drive Hose Clips:-            |           |            |             |
| 4   | 00        | 13-20      | 1/2-3/4     |
| 4   | 0         | 16-22      | 5/8-7/8     |
| 4   | 0X        | 18-25      | 3/4-1       |
| 2   | 1         | 25-35      | 1-1 3/8     |
| 2   | 1X        | 30-40      | 1 1/8-1 5/8 |
| Nut & Bolt Clips:-                          |           |            |             |
| 4   | NB0709    | 7-9        |             |
| 4   | NB1113    | 11-13      |             |
| Material Spec: Mild Steel Zinc Protected    |           |            |             |
| Part No: PPAUTO                             |           |            |             |
| Dimensions [mm]: 39 [H] x 180 [W] x 150 [D] |           |            |             |
| Total Weight when Full: .475 Kgs            |           |            |             |





(Part no. PPIND)

## POCKET PACK CONTENTS

| Qty.                             | Size Ref. | Adjustment |             |
|----------------------------------|-----------|------------|-------------|
|                                  |           | mm         | Inches      |
| Jubilee® Worm Drive Hose Clips:- |           |            |             |
| 4                                | 00        | 13-20      | 1/2-3/4     |
| 4                                | 0         | 16-22      | 5/8-7/8     |
| 4                                | 0X        | 18-25      | 3/4-1       |
| 2                                | 1         | 25-35      | 1-1 3/8     |
| 2                                | 1X        | 30-40      | 1 1/8-1 5/8 |

Material Spec: Mild Steel Zinc Protected  
 Part No: PPIND  
 Dimensions [mm]: 39 [H] x 180 [W] x 150 [D]  
 Total Weight when Full: .450 Kgs



**Industrial Version**



Sold in packs of 10



BS 5315  
 KM06246

(Part no. PPSS)

**Stainless Steel Version**

## POCKET PACK CONTENTS

| Qty.                             | Size Ref. | Adjustment |             |
|----------------------------------|-----------|------------|-------------|
|                                  |           | mm         | Inches      |
| Jubilee® Worm Drive Hose Clips:- |           |            |             |
| 4                                | 000       | 9.5-12     | 3/8-1/2     |
| 2                                | 0         | 16-22      | 5/8-7/8     |
| 2                                | 0X        | 18-25      | 3/4-1       |
| 4                                | 1         | 25-35      | 1-1 3/8     |
| 2                                | 2         | 40-55      | 1 5/8-2 1/8 |

Material Spec: All 304 Stainless Steel  
 Part No: PPSS  
 Dimensions [mm]: 39 [H] x 180 [W] x 150 [D]  
 Total Weight when Full: .450 Kgs



Sold in packs of 10





## Jubilee® Tools



## Jubilee® Sales Support



*beware of imitations!*



# FFT

Fasteners, Fixings & Tools

[www.fastenersfixingsandtools.co.uk](http://www.fastenersfixingsandtools.co.uk)

Email : [info@fasteners-ft.co.uk](mailto:info@fasteners-ft.co.uk)

Tel.01234 333949

Fax.01234 211069