


CSK HEAD SLOTTED MACHINE SCREW DIN963

Countersunk or flat head slotted machine screw to DIN963. Available fully threaded in mild steel, mild steel zinc plated, brass, nylon and Stainless Steel grade A2 & A4

Csk lengths are measured including the head.

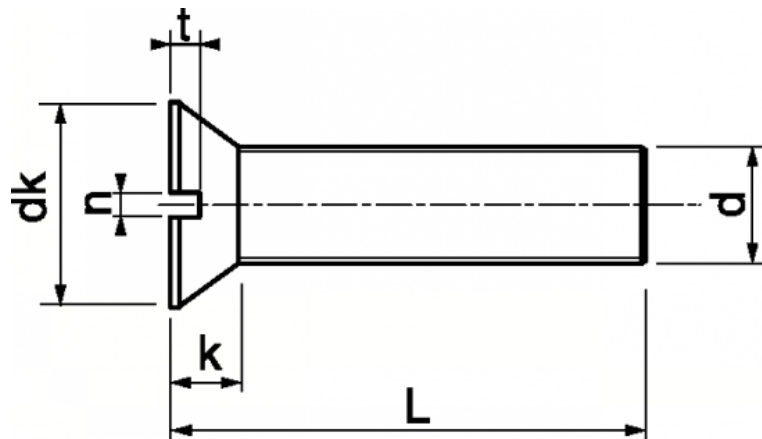

d1 Nom.	dk	pitch	k Max.	n	t Min.
M1.6	3.00	0.35	1.00	0.40	0.32
M2	3.80	0.40	1.20	0.50	0.40
M2.5	4.70	0.45	1.50	0.60	0.50
M3	5.50	0.50	1.65	0.80	0.60
M3.5	7.30	0.60	2.35	1.00	0.70
M4	8.40	0.70	2.70	1.20	0.80
M5	9.30	0.80	2.70	1.20	1.00
M6	11.30	1.00	3.30	1.60	1.20
M8	15.80	1.25	4.65	2.00	1.60
M10	18.30	1.50	5.00	2.50	2.00
M12	22.00	1.75	6.00	3.00	2.40
M16	29.00	2.00	8.00	4.00	3.20

All dimension's in mm