


HEXAGON RIVET BUSH

Hexagon rivet bushes provide a strong female thread in sheet metal. The spigot is placed through a pre-punched hole and riveted on the reverse side. The corners of the hexagon bite into the sheet providing excellent torque resistance. Various spigot lengths are available to suit different sheet thickness, with a serrated face, plain face or serrated spigot. Available in steel self-colour, steel zinc plated and Stainless Steel.

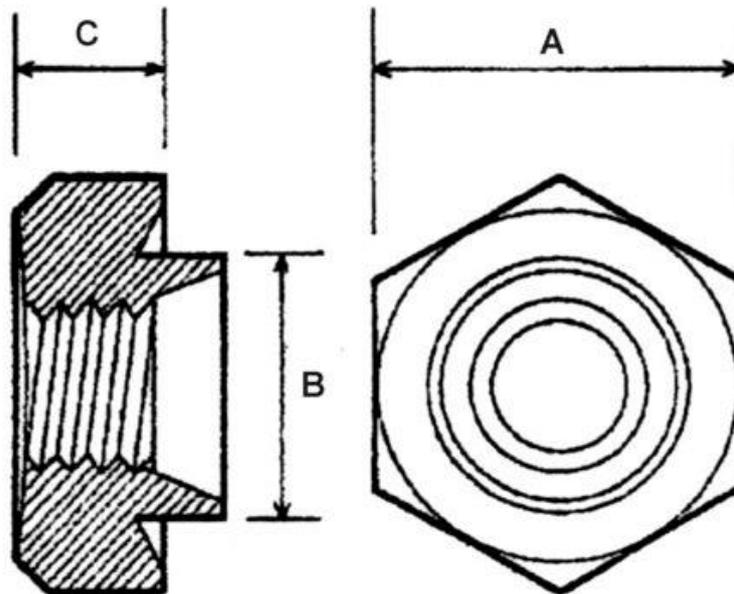

Thread Nom.	Hole size +0.5 -0	A ±0.13	C ± 0.13	B +0 -0.13	Material Thickness SWG/mm
M2.5*	5.54	7.92	3.17	5.54	16G/1.6mm
M3	5.54	7.92	3.17	5.54	10G/3.2mm - 20G/0.91mm
M3.5*	6.73	7.92	3.17	6.73	10G/3.2mm - 20G/0.91mm
M4	6.73	7.92	3.17	6.73	10G/3.2mm - 20G/0.91mm
M5	7.92	9.52	3.81	7.92	10G/3.2mm - 20G/0.91mm
M6	9.52	11.10	5.08	9.52	10G/3.2mm - 20G/0.91mm
M8	12.70	14.27	6.35	12.70	10G/3.2mm - 20G/0.91mm
M10	15.87	19.05	7.62	15.87	8G/4.0mm – 18G/1.2mm
M12	19.05	22.22	10.16	19.05	8G/4.0mm – 16G/1.6mm

All dimension's in mm

*denotes non-preferred size.